

A COMPACT
AND TIME SAVING PAYMENT SOLUTION



CASHLESS
PAY STATION

SOFTRA IPO-1



Intuitive




Convenient



Secure

Dimensions (mm):

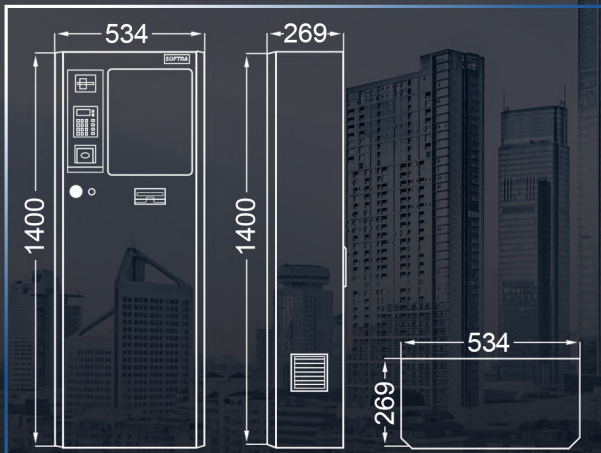

Intended Use:

“SOFTRA iPO-1” bank card payment terminal provides the customers with a convenient and fast payment, reducing operation and maintenance costs via a contactless bank card payment method.

The terminal can be operated in two ways. First of all, as a 1400 mm high pay station designed for convenient payment at the parking lot exit without getting out of the car. Secondly, as a 1700 mm high pay station, which can take payments at a certain location functioning as an automatic pay station. The “SOFTRA iPO-1” terminal is managed via the “a.Lot Cloud 3.0” user interface. Remote login provides all the information about the pay station status, operation history, fiscal data.

TECHNICAL SPECIFICATIONS

User Guidance:	<ul style="list-style-type: none"> Vertically mounted LCD touch screen monitor (15") Very touch-sensitive, works even with the gloves Intuitive user guidance via symbols and multilingual text VoIP intercom with a call button, microphone, and loudspeaker (optional)
Payment Processing:	<ul style="list-style-type: none"> Accepts payment cards: classic (PIN keyboard) and NFC
Housing:	<ul style="list-style-type: none"> The galvanized hard metal case provides break-in and anti-vandal protection Dimensions (WxDxH): 534 x 269 x 1400 mm (entries/exits) 534 x 269 x 1700mm (Pay-on-Foot) Protection class: IP65 Colors: NCS S-8000-N metalized sand structure housing color (standard) Preferred colors – RAL color palette (optional)
Behavior in the Event of Network Failure:	<ul style="list-style-type: none"> In case of a network failure, “SOFTRA iPO-1” will store up all information of payment transactions
Connections / Power Supply:	<ul style="list-style-type: none"> Communication interface: Ethernet, 100 Mbit/sec, RJ45 Control: on-site: through administrator’s GUI on a touchscreen remote: through “a.Lot Cloud 3.0” GUI Power supply: 230 V, 5A (max)
Place of Installation:	<ul style="list-style-type: none"> For outdoor and indoor use Mounted on the concrete foundation or concrete surface Temperature Range: -20 °C ... +50 °C (standard) Relative Humidity: 10% ... 95%
Weights (standard):	<ul style="list-style-type: none"> 70kg
Approvals of Conformity:	<ul style="list-style-type: none"> CE, RoHS certified
Other Features:	<ul style="list-style-type: none"> Identification Equipment (optional) Heater 500W and thermostat. Additional heaters make it possible to operate the “SOFTRA iPO-1” in particularly cold weather (optional)